

SUPER SHEAVE SERIES

Certified for use in ATEX Zone 1 locations (CE Ex 11 2 G c 11B T4 Tamb -40deg to +50deg)


Individually serial numbered parts for full traceability

Sheave size available (but not limited to)

18", 22", 26", 32", 36" & 48"

Grooved to suit cable specification

Double grooved sheaves available to allow two different line sizes

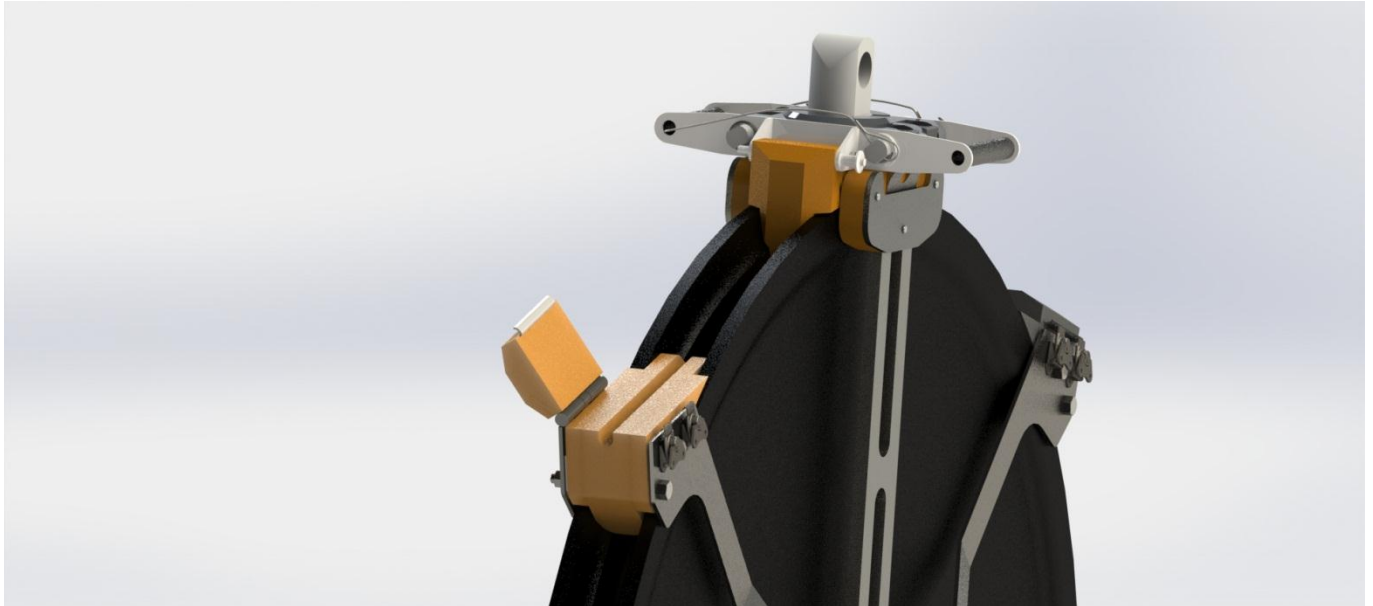


Integral cable retaining device to prevent cable jump out

The hand guard assembly, with one piece hinged design and dual locking catches, allows for easy access, secure closing and dropped object prevention. Gate and hand guard design allows for the cable to be entered or ejected from the front rapidly and without obstruction

Safe working load of 50000lbs on Head Fittings & 25000lbs on line pull

Factor of Safety 4:1

Low maintenance, sealed sheave bearings & solid head fitting bearing

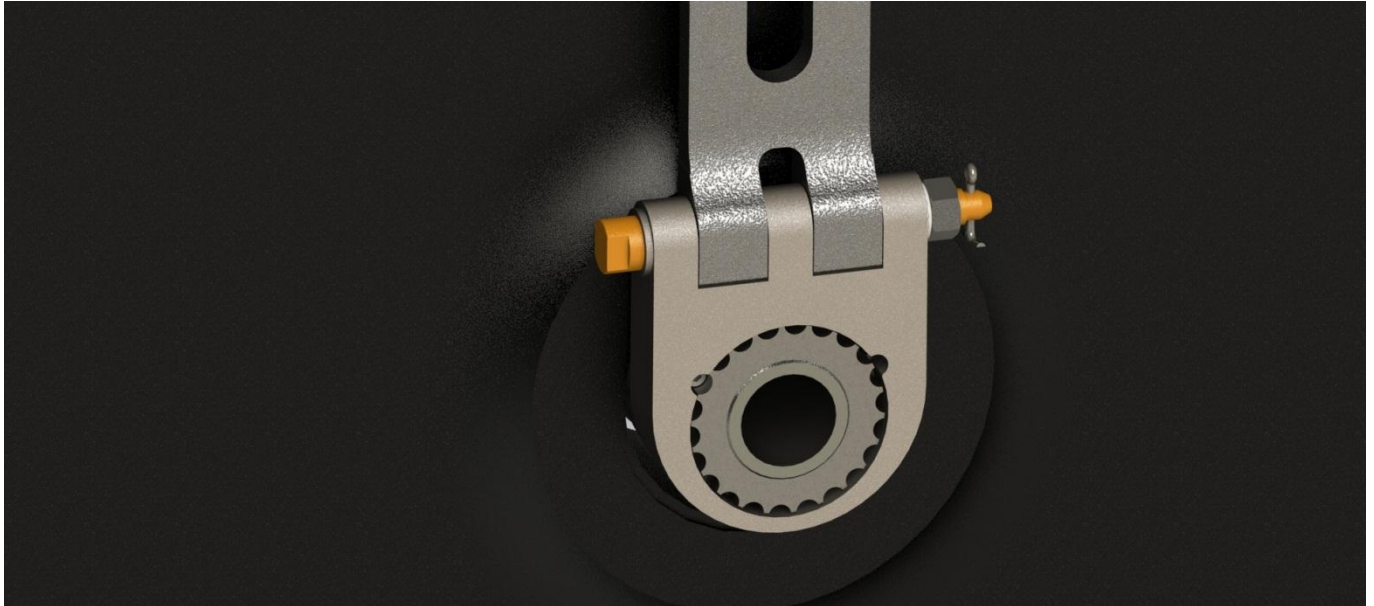

All load bearing components are made from 17-4ph stainless steel

Double retainment for all pins

Hollow centre shaft has the full rating of the head unit which allows for a secondary safety hanging point. This guarantees that the sheave will not fall even in the event of a failure of any of the parts from the shackle upwards.

The hollow design also provides the capability to add enhancements such as stands, line wipers, ice scrapers etc.